



Eclipse[®] LD



Serra L'Ombre



Net Weight 20 Kg

PURPOSE

Eclipse[®] LD is used to tint glass, plastic and poly carbonate greenhouses for one season. It will regulate light intensity and humidity conditions for a perfect climate inside your greenhouse.

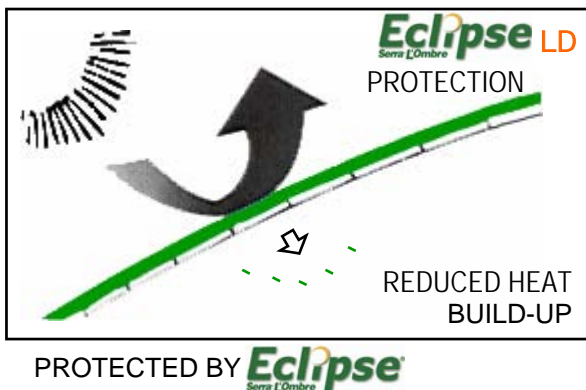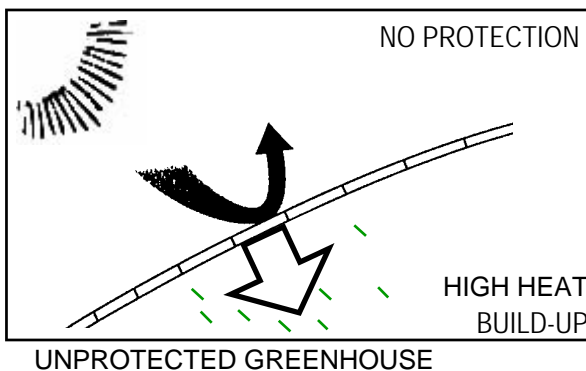

MAIN PROPERTIES

- Strong temperature reduction in greenhouses protected by **Eclipse[®] LD**
- Barrier against hot, short wavelength infrared rays.
- Opaque in dry weather, transparent when wet.
- Easy to use, to be diluted with water.
- Easy to remove with its cleaner **LDNet**

SPECIAL FEATURES OF **Eclipse[®] LD**

- Safe for the cultures and users during application.
- Very good adherence for longer-lasting results on glass, plastic and polycarbonate.
- Highly concentrated and rain resistant.
- Control of the action 'on-off'

USE

Dilution :

1 vol. **Eclipse[®] LD**
+ 3 to 5 volumes of water

Application :

By spray gun or roller on dry, grease-free glass, plastic or polycarbonate.

Number of coats :

One at the beginning of spring + one before the hot season if required, depending on the crop

Yield :

1 kg covers 35 to 45 m².

Removal:

water + **LDNet**

SUDLAC

1, rue Gaston Monmousseau
38 130 ECHIROLLES-France

Tel : +33 (0)4 76 23 20 54

Fax : +33 (0)4 76 09 34 15

Email : sudlac@sudlac.com

www.sudlac.com

FOR PROFESSIONAL USE ONLY IMPORTANT NOTE: The information in this data sheet is not intended to be exhaustive and is based on the present state of our knowledge and current laws. The given data is based on average observed results. Our suggestions do not relieve the user of the necessity to test our products and to verify for the suitability for the purpose envisaged according to the used conditions. Any person using the product for any purpose other than that specifically recommended in the technical data sheet does so at his own risk. Always read the safety data sheet and the technical data sheet for this product. All advice we give or any statement made about the product by us (whether in this data sheet or otherwise) is correct to the best of our knowledge but we have no control over the quality or the condition of the substrate or the many factors affecting the use and application of the product. Therefore, we do not accept any liability whatsoever for any loss damage arising out of the use of the product. All products supplied and technical advices given are subject to our standard terms and conditions of sale. You should request a copy of this document and review it carefully. The information contained in this data sheet is subject to modification from time to time in the light of experience and our policy of continuous development. It is the user's responsibility to verify that this data sheet is current prior to using the product.